



# Sirius

## **A compact spotlight with a high level of protection**

A range of recessed LED spotlights which offers a solution for many lighting demands, from residential to hospitality, restaurant to retail and much more. Sirius higher IP-rating makes it suitable to use in bathrooms and other wet locations.

## Features



### Optimum Focused Illumination


LED spotlights designed with efficient reflector and anti-glare lens for optimal visual comfort. Sirius combines many features such as multiple beam angles, orientable or fixed, higher IP-rating suitable for wet locations.

## Family range






**Product range**

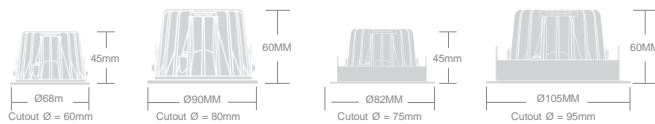

**Beam Angle**



**Performance**

Product code	Drive Current (mA)	Fixture Lumens
Sirius 9W 830	350	748
Sirius 9 W 840	350	780
Sirius 12 W 830	500	996
Sirius 12 W 840	500	1050

**Features**

A range of recessed LED spotlights designed with efficient reflector and anti-glare lens for optimal visual comfort. Sirius combines many features such as multiple beam angles, orientable or fixed, higher IP-rating that can be used in bathrooms and other wet areas.

**Applications**

Ideal to use in Residential, Hospitality, Restaurants and Retail.

**Technical Specifications**

**Body:** made of specially treated die-cast aluminum electrostatic powder coated in Matt white (RAL 9003), other RAL finishes available upon request. **Optic:** Highly efficient anti-glare lens with choice of various beam angles 15°, 24°, 36° and 60° to suit every application.

**Light source:** Latest generation of high efficiency COB LED, CRI>80, MacAdam≤2, 50.000 h L70. **Color**

**temperature:** standard available as 3000K and 4000K, other color temperature available upon request.

**Dimming Options:** Leading and trailing edge dimming, DALI, DSI and 1-10V Dimming. **IP rating:** IP54 makes it suitable for wet locations.

\* For special RAL colors and CCT please contact our sales representative for minimum order quantities and or additional charges.

**Ordering Guide**

Family name	Mounting	Family range	Dimensions	Trim color	Power	CCT / CRI	Optics	Driver	IP Rating			
Sirius	RVT	FD	Fixed	68	WH	White	9W	3000 830	15°	HF	Fixed o/p	IP54
				90	RAL	RAL	12W	4000 840	24°	D	DALI	
							36°	V	0-10V			
							60°	C	Casambi			
		AJ	Adjustable	82								
				105								
Atos	RVT	AJ	105	White	9W	840	24°	HF	IP54			