



Sirius

A compact spotlight with a high level of protection

A range of recessed LED spotlights which offers a solution for many lighting demands, from residential to hospitality, restaurant to retail and much more. Sirius higher IP-rating makes it suitable to use in bathrooms and other wet locations.

FEATURES —

Optimum Focused Illumination

Sirius delivers brilliance to both residential and hospitality projects.

Application: Residential, Hospitality, Restaurants & Retail.

Ideal to use for rooms with higher moisture as Mirror light for bathrooms.

LED spotlights designed with efficient reflector and anti-glare lens for optimal visual comfort. Sirius combines many features such as multiple beam angles, orientable or fixed, higher IP-rating suitable for wet locations.



FAMILY —

Members

Sirius RVT



Sirius RVT Adjustable
Ø 82, 105 mm



Sirius RVT Fixed
Ø 68, 90 mm



Product range




Sirius RVT Adjustable

Ø 82, 105 mm




Sirius RVT Fixed

Ø 68, 90 mm

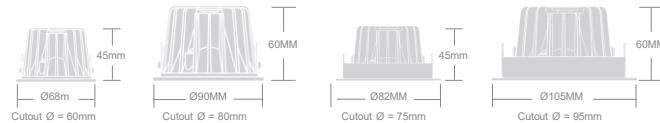

Beam Angle

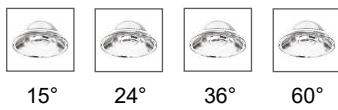

15°

24°

36°

60°

Performance

Product code	Drive Current (mA)	Fixture Lumens
Sirius 9W 830	350	748
Sirius 9W 840	350	780
Sirius 12W 830	500	996
Sirius 12W 840	500	1050

Features

A range of recessed LED spotlights designed with efficient reflector and anti-glare lens for optimal visual comfort. Sirius combines many features such as multiple beam angles, orientable or fixed, high IP-rating that can be used in bathrooms and other wet areas.

Application

Ideal to use in Residential, Hospitality, Restaurants and Retail.

Technical Specifications

Body: made of specially treated die-cast aluminum electrostatic powder coated in Matt white (RAL 9003), other RAL finishes available upon request. **Optic:** Highly efficient anti-glare lens with choice of various beam angles 15°, 24°, 36° and 60° to suit every application.

Light source: Latest generation of high efficiency COB LED, CRI>80, MacAdam≤2, 50.000h L70. **Color**

temperature: standard available as 3000K and 4000K, other color temperature available upon request.

Dimming Options: Leading and trailing edge dimming, DALI, DSI and 1-10V Dimming. **IP rating:** IP54 makes it suitable for wet locations.

* For special RAL colors and CCT please contact our sales representative for minimum order quantities and or additional charges.

Ordering Guide

Family name	Mounting	Family range	Dimensions	Trim color	Power	CCT / CRI	Optics	Driver	IP Rating
Sirius	RVT	FD	Fixed	68	WH	White	9W	3000	830
				90	RAL	RAL	12W	4000	840
							24°	D	DALI
							36°	V	0-10V
							60°	C	Casambi
AJ Adjustable		82							
		105							
Atos	RVT	AJ	105	White	9W	840	24°	HF	IP54